



[→ See all Eaton 9SX Documentation](#)

[→ See all Eaton 9SX \(700VA-3kVA\) models](#)

9SX2000I

Eaton 9SX 2000I

General

Topology	On-line double conversion with PFC (Power Factor Correction) system
Configuration	Tower
Part Number	9SX2000I
Rating (VA/Watts)	2000/1800
Dimensions (H x W x D, mm)	346 x 214 x 412
Warranty	2 years warranty

Electrical Input

Connection (1) IEC-320-C14



Input Voltage Range	200-276V without derating (up to 140-276V with derating)
Nominal Voltage	200/208/220/230/240V
Frequency	50/60 Hz autoselection
Frequency Range	40-70 Hz

Electrical Output

Outlets (8) IEC-320-C13



Output Frequency 50/60 Hz autoselect, frequency converter as standard

Battery


2000

1750

1500

- Standard Runtime
- With 1 EBM
- With 2 EBMs
- With 3 EBMs

Show:
 Standard Runtime
 With 1 EBM
 With 2 EBMs
 With 3 EBMs

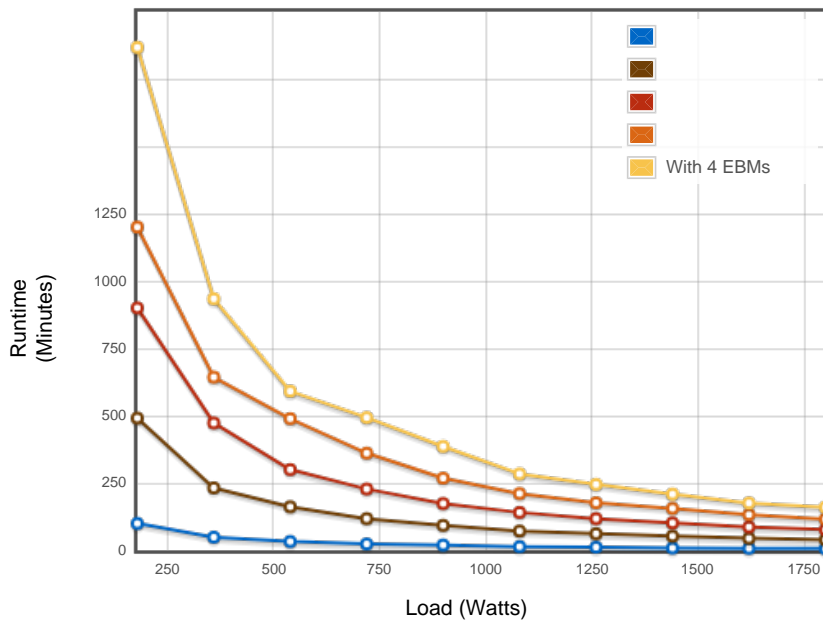

With 4 EBMs

Hover over graph for detailed runtime values

Battery runtimes are approximate and may vary with equipment, configuration, battery age, temperature, etc. Actual runtime may vary from +/- 15% around these typical values

Battery Management

ABM® and Temperature compensated charging method (user selectable), automatic battery test, deep discharge protection, automatic recognition of external battery units.

Extended Battery Capability

EBM

Communications

User Interface

Multilingual graphical LCD display

Communication Ports

1 USB port + 1 serial RS232 port + 1 mini-terminal block for Remote Power Off + 1 mini-terminal block for Output relay

Communication Slot

1 slot for Network-M2, Network-MS, ModBus-MS or Relay-MS cards

Environmental & Standards

Audible Noise

<45dB

Operating Temperature

0 to 40°C continuous

Safety markings

IEC/EN 62040-1, UL 1778, CSA 22.2

EMC Markings

IEC/EN 62040 -2 , FCC Class B, CISPR22 Class B

Approvals

CE /CB report (TUV) / cULus / EAC / RCM / BIS / KCC

In the interests of continuous product improvement all specifications are subject to change without notice.

[Privacy Policy](#)
[Terms & Conditions](#)
[Copyright](#)

© 2018 Eaton
 All Rights Reserved