

[→ See all Eaton 9SX Documentation](#)
[→ See all Eaton 9SX \(700VA-3kVA\) models](#)

9SX2000IR

Eaton 9SX 2000I Rack2U

General

Topology	On-line double conversion with PFC (Power Factor Correction) system
Configuration	Rack
Part Number	9SX2000IR
Rating (VA/Watts)	2000/1800
Dimensions (H x W x D, mm)	86.5 x 438 x 608
Warranty	2 years warranty

Electrical Input

Connection (1) IEC-320-C14



Input Voltage Range	200-276V without derating (up to 140-276V with derating)
Nominal Voltage	200/208/220/230/240V
Frequency	50/60 Hz autoselection
Frequency Range	40-70 Hz


Electrical Output


Outlets (8) IEC-320-C13



Output Frequency	50/60 Hz autoselect, frequency converter as standard
------------------	--

Battery

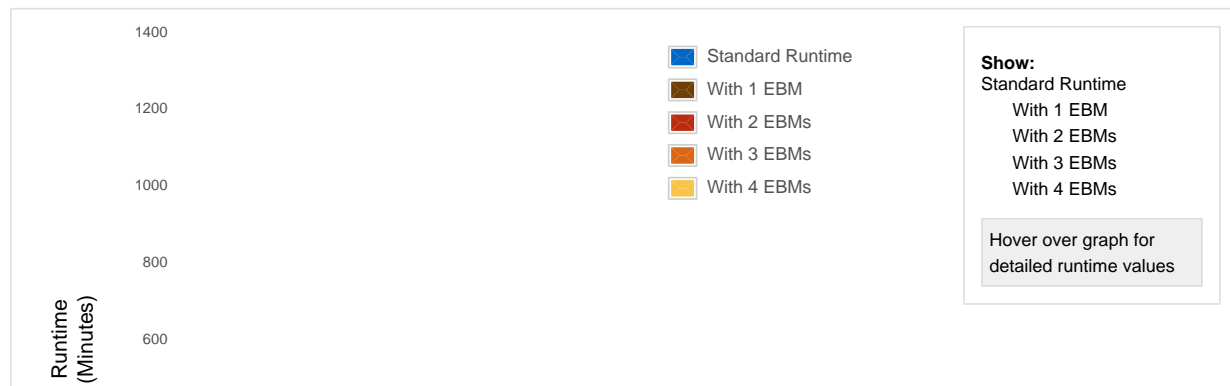

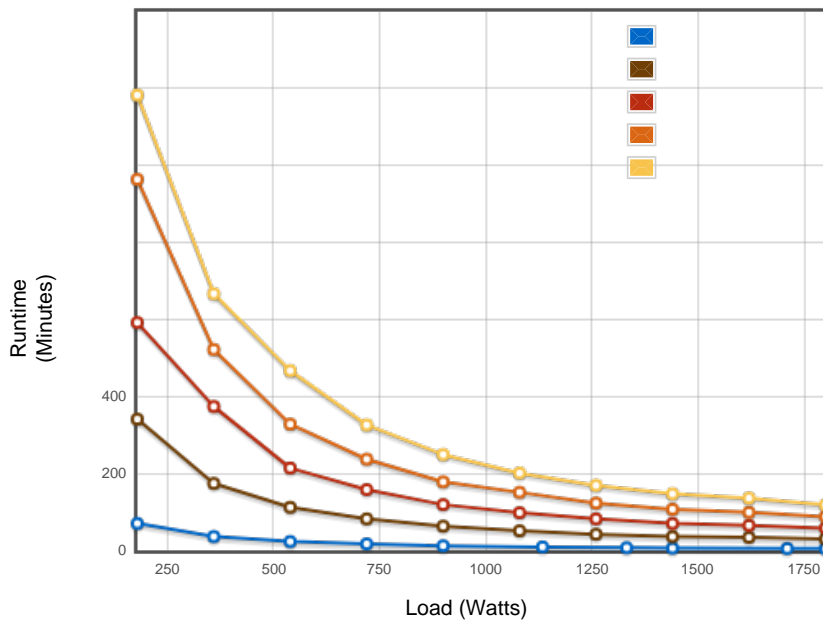

Battery runtimes are approximate and may vary with equipment, configuration, battery age, temperature, etc. Actual runtime may vary from +/- 15% around these typical values

Battery Management	ABM® and Temperature compensated charging method (user selectable), automatic battery test, deep discharge protection, automatic recognition of external battery units.
Extended Battery Capability	EBM with Rack Kit

Communications

User Interface	Multilingual graphical LCD display
Communication Ports	1 USB port + 1 serial RS232 port + 1 mini-terminal block for Remote Power Off + 1 mini-terminal block for Output relay
Communication Slot	1 slot for Network-M2, Network-MS, ModBus-MS or Relay-MS cards

Environmental & Standards

Audible Noise	<45dB
Operating Temperature	0 to 40°C continuous
Safety markings	IEC/EN 62040-1, UL 1778, CSA 22.2
EMC Markings	IEC/EN 62040 -2 , FCC Class B, CISPR22 Class B
Approvals	CE /CB report (TUV) / cULus / EAC / RCM

In the interests of continuous product improvement all specifications are subject to change without notice.

[Privacy Policy](#)
[Terms & Conditions](#)
[Copyright](#)

© 2018 Eaton
 All Rights Reserved