



[→ See all Eaton 9SX Documentation](#)

[→ See all Eaton 9SX \(700VA-3kVA\) models](#)

## 9SX3000IR

Eaton 9SX 3000I Rack2U

### General

Topology	On-line double conversion with PFC (Power Factor Correction) system
Configuration	Rack
Part Number	9SX3000IR
Rating (VA/Watts)	3000/2700
Dimensions (H x W x D, mm)	86.5 x 438 x 608
Warranty	2 years warranty

### Electrical Input

Connection (1) IEC-320-C20



Input Voltage Range	200-276V without derating (up to 140-276V with derating)
Nominal Voltage	200/208/220/230/240V
Frequency	50/60 Hz autoselection
Frequency Range	40-70 Hz


### Electrical Output


Outlets (8) IEC-320-C13 (1) IEC-320-C19



Output Frequency 50/60 Hz autoselect, frequency converter as standard

### Battery

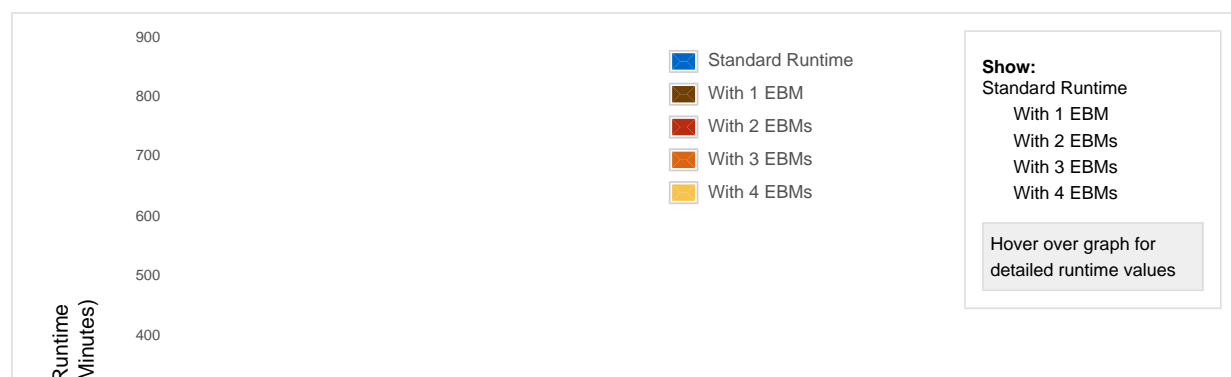

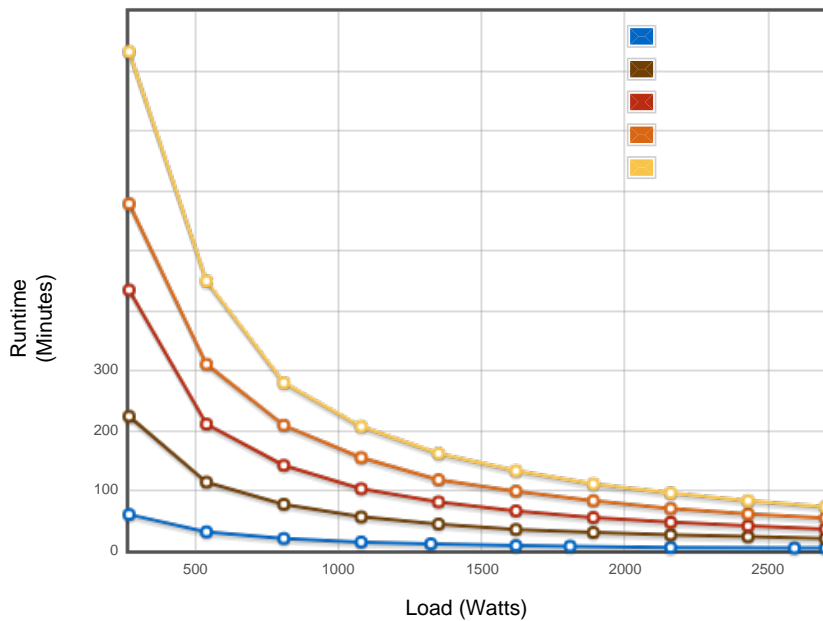

Battery runtimes are approximate and may vary with equipment, configuration, battery age, temperature, etc.  
Actual runtime may vary from +/- 15% around these typical values

Battery Management	ABM® and Temperature compensated charging method (user selectable), automatic battery test, deep discharge protection, automatic recognition of external battery units.
Extended Battery Capability	EBM with Rack Kit

### Communications

User Interface	Multilingual graphical LCD display
Communication Ports	1 USB port + 1 serial RS232 port + 1 mini-terminal block for Remote Power Off + 1 mini-terminal block for Output relay
Communication Slot	1 slot for Network-M2, Network-MS, ModBus-MS or Relay-MS cards

### Environmental & Standards

Audible Noise	<45dB
Operating Temperature	0 to 40°C continuous
Safety markings	IEC/EN 62040-1, UL 1778, CSA 22.2
EMC Markings	IEC/EN 62040 -2 , FCC Class B, CISPR22 Class B
Approvals	CE /CB report (TUV) / cULus / EAC / RCM

In the interests of continuous product improvement all specifications are subject to change without notice.

[Privacy Policy](#)  
[Terms & Conditions](#)  
[Copyright](#)

© 2018 Eaton  
 All Rights Reserved