


Vertical PDU

Body Profile:	65mm wide x 55mm deep
Body Material:	Extruded Aluminium
Body Colour:	Black powder coat
Outlets:	24xC13
Protection:	16A: none 32A: 2x16A Thermal Trips.
Indicators:	16A and 32A: Overall Neon
Mains lead:	16A: 3mtr HO7 2.5mmsq 16A Commando 32A: 3mtr HO7 4mmsq 32A Commando
Earthing:	External M6 earth rear
Rating:	16A@240Vac or 32A@240ac
Standards:	Manufactured in accordance with BS EN 60950-1
WEEE:	Compliant
RoHS:	Compliant
CE:	Compliant
Operating Temperature:	-10° to +80°C

Part number variations

G4-459-N3B

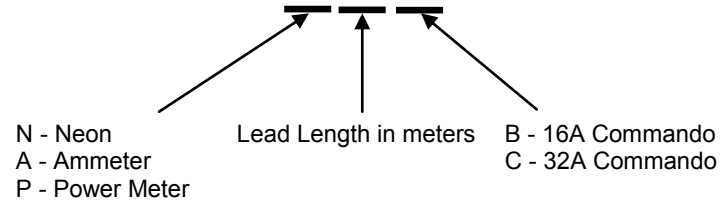

 <small>Network Security Systems Europe (UK)</small>	
	141116
	EMM

N4-459-00

© 2016 This drawing and the works depicted are the copyright of NSSE Ltd and may not be reproduced or amended except by written permission. No liability will be accepted for amendments made by other persons.