


G4-524-N3C - Neon, 2x16A Trips 32A Commando

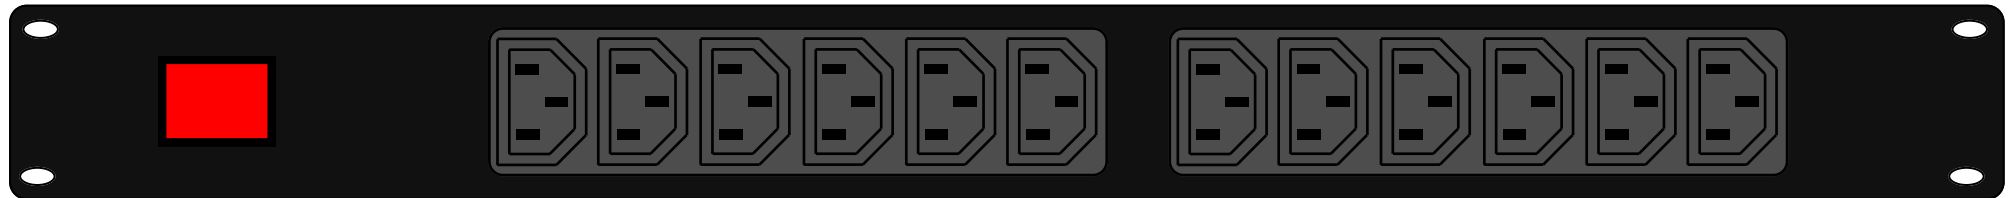

G4-524-N3B - Neon, 16A Commando

Part number variations

G4-524-N3B

N - Neon
 A - Ammeter
 P - Power Meter
 Lead Length in meters
 B - 16A Commando
 C - 32A Commando

1U 19inch Horizontal PDU

Body Profile: 1U 19inch
 Body Material: Mild Steel
 Body Colour: Black powder coat
 Outlets: 12xC13
 Protection: 16A: none
 32A: 2x16A Thermal Trips.
 Indicators: 16A and 32A: Overall Neon
 Mains lead: 16A: 3mtr HO7 2.5mmsq 16A Commando
 32A: 3mtr HO7 4mmsq 32A Commando
 Earthing: External M6 earth rear
 Rating: 16A@240Vac or 32A@240ac
 Standards: Manufactured in accordance with BS EN 60950-1
 WEEE: Compliant
 RoHS: Compliant
 CE: Compliant
 Operating Temperature: -10° to +80°C

 Network Security Systems Europe (UK)	
	141116
	EMM

N4-524-00

© 2016 This drawing and the works depicted are the copyright of NSSE Ltd and may not be reproduced or amended except by written permission. No liability will be accepted for amendments made by other persons.